

FLEXITRAILER FT-TR-S




Technische gegevens

Geschikt voor

Schoteldruk
 Maximale aslast per as
 Totaal toegestane massa
 Leeggewicht
 Nuttig laadvermogen
 Schotelhoogte
 Chassishoogte
 Bandenmaat
 Elektrische aansluitingen



Technische Daten

Geeignet für

Sattellast
 Max. Achslast per Achse
 Gesamt zulässige Masse
 Leergewicht
 Nutzlast
 Sattelhöhe
 Chassishöhe
 Reifengröße
 Elektrische Anschlüsse



Technical data

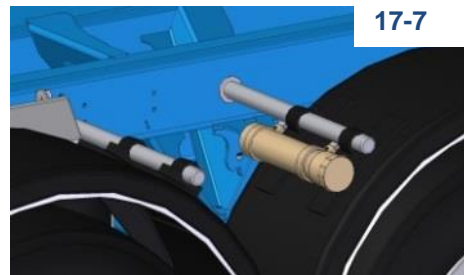
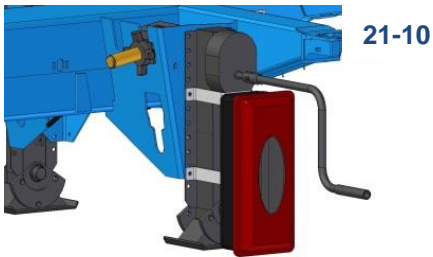
Suitable for




Kingpin weight
 Maximal Axleload / axle
 Gross trailer weight
 Empty weight
 Payload
 Fifthwheel height
 Chassisheight
 Tyresize
 Electrical connectors

FT-TR-S

20 ft rear
 30 ft
 2x 20 ft
 40 ft (HC)
 16.000 kg
 9.000 kg
 43.000 kg
 4.500 kg
 38.500 kg
 1.110 mm
 1.110 mm
 385/55 R22,5
 2x 7-pin + 1x 15 pin

OPTIES / OPTIONEN / OPTIONS



		
Basis opties	Basis Optionen	Basic options
11-4-15 Valx trommelremmen As 1 liftas manueel / automatisch	Valx Trommelbremsen Achse 1 Liftachse man. / automatisch	Valx drumbrakes Axle 1 liftaxle manual / automatic
19-55 Bandenmaat 385/55R22,5	Reifengröße 385/55 R22,5	Tyresize 385/55 R22,5
19-B Banden keus D-TEC 1 laag 2K natlak RAL 5015 / 9005	Reifen nach Wahl D-TEC 1 Schicht 2K RAL 5015 / 9005	Tyremake D-TEC choice 1-Layer coating 2K RAL 5015 / 9005
09-1-2 Bovenzijde schooperen	Oberseite spritzverzinkt	Topside schooping
21-5 2 Wielkeggen	2 Radkeile	2 Wheelwedges
Comfort opties	Komfort Optionen	Comfort options
11-4-8 VALX / Mercedes-Benz / SAF schijf BPW trommelremmen	VALX / Mercedes-Benz / SAF Scheibe BPW Trommelbremsen	VALX / Mercedes-Benz / SAF disc BPW drumbrakes
11-2-17 laatste as naloop gestuurd As 1 aut. / handm. liftas, as 3 handm.	Letzte Achse nachlaufgelenkt A. 1 aut. / man. Liftachse, A. 3 man.	Last axle steeringaxle A. 1 aut./man. liftaxle, axle 3 manual
11-15 ATO	ATO	ATO
19-65 Bandenmaat 385/65R22,5. Continental HTR2 /	Reifengröße 385/65 R22,5 Goodyear LHT II / GT /	Tyresize 385/65 R22,5 Michelin XTE3
19-7-3 Alcoa Durabright 6 alu velgen Reservewiel staal 385/65 of 55	Alcoa Durabright 6 alu Felgen Reserverad Stahlfelge 385/65 oder 55	Alcoa Durabright 6 alloy rims Sparewheel steel 385/65 or 55
09-1-1 Volledig schooperen Standard Coating in RAL 3002,	Völlig spritzverzinkt RAL 5002, RAL 5010, RAL 5015,	Full schooping RAL 7016, RAL 7021, RAL 9005
09-6-SP spuiten 2-laags 2K natlak naar keuze	Lackieren 2 Schicht 2K nach Wahl	2-Layer coating 2K customer choice
09-4-3 naven + doppen spuiten	Naben und Kappen lackiert	Hubs and caps painted
15-12 6x ronde 3-kamer lampen, alles LED	6x Runde 3-Kammerleuchten LED	6 Round lights, LED
05-QL-TR Quicklocks 6x	Quicklocks 6x	Quicklocks 6x
07-26 Rolletjes onder achterkoker	Rollen unter Heckausschub	Bearings for easier cranking out
07-3 Kingpenslohouder	Halter für Königszapfenverriegelung	Holder for kingpinlock
07-5 Gevaarlijke stoffen bord	Gefahrgutschild	ADR sign at the rear, orange
07-NS-9 Reclameplaat	Werbungstafel Stahl am Heck	Steel plate at the rear, painted
17-7 Documenten koker uit plastic.	Dokubox Kunststoff	Document tube
17-21 Brede spatlap onder de bumper	Breiter Schmutzfänger	Mudflap under bumper
21-10 Houder zonder 6 kg brandblusser	Halter ohne 6kg Feuerlöscher	Holder without 6kg fire extinguisher
21-8 Kingpinslot	Königszapfenverriegelung	Kingpinlock
03-4-A ADR-fabrikantverklaring	ADR Herstellerbestätigung	ADR Manufacturer certificate
25-NS-2 LZV uitgevoerd en gekeurd	nur für NL	only NL
17-2 ADR/VLG uitvoering incl certificaat	nur für NL	only NL

